

ERM 18 Ex e /60 Hz



Short description

Semi-centrifugal duct fan, DN 180, alternating current 230V/60 Hz, explosion proof, medium: gas

Application examples

Environment with explosion hazard (zone 1 and 2), Dye shop, Battery room, Commercial premises, Production facility

Article number 0080.0373

Technical data

Air flow volume	340 m³/h
Rotating speed	3.255 1/min
Impeller type	semi-radial
Speed controllable	–
Type of voltage	Alternating current
Rated voltage	230 V
Frequency	60 Hz
Nominal output	88 W
cosφ	0,89
I _{nom}	0,43 A
I _{max} at U _{Nominal}	0,43 A
Degree of protection	IP 64
Insulation class	B
Mains cable	3 x 1,5 mm²
Installation position	vertical / horizontal
Material impeller	Synthetic material
Housing material	Synthetic material
Colour	Signal black, similar to RAL 9004
Weight	3,57 kg
Weight including packaging	3,83 kg
Nominal size	180 mm
Width	262 mm
Height	252 mm
Depth	187 mm
Width with packaging	255 mm
Height with packaging	190 mm
Depth with packaging	240 mm
EX designation in accordance with the ATEX Directive	Ex II 2 G
EX designation in accordance with standard	Ex eb IIB + H ₂ T4 Gb / Ex h IIB + H ₂ T4 Gb

ERM 18 Ex e


Ta ambient temperature	-20 °C ≤ Ta ≤ +50 °C
I _A /I _N	2,3
Time t _E	28 sek
Operating mode	S1
EC type examination certificate	TÜV-A 18ATEX0052 X, IECEx EPS 19.0025X
Temperature class	T4
Capacitor capacity / voltage	3μF/280V
Temperature class of insulating materials Th. Cl.	130 (B)
Packing unit	1 piece
Range	C
GTIN (EAN)	4012799803737

Sound power level in octave range

	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Total
L_{WA5, S5} (dB(A))	34	47	56	60	63	61	56	50	67

L_{WA5}= free inlet sound power level in dB.

Characteristic curve

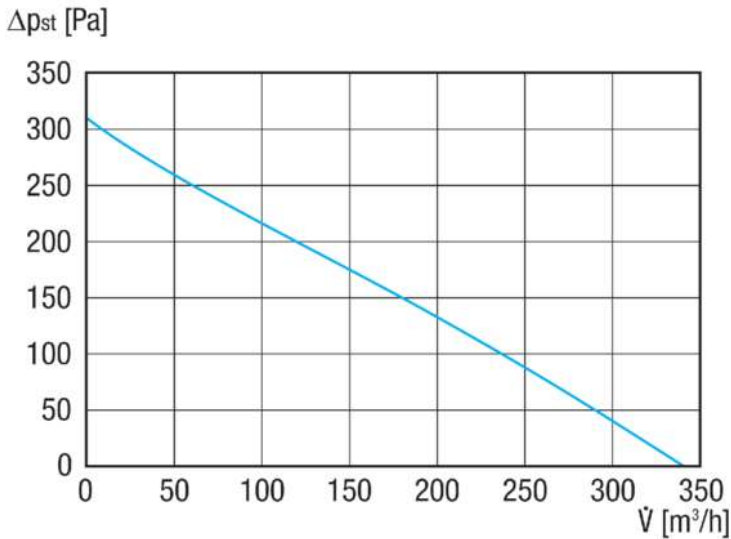

ERM 18 Ex e

Dimensioned drawing [mm]

